




Community Impact of Pipeline Construction

Typical Activities

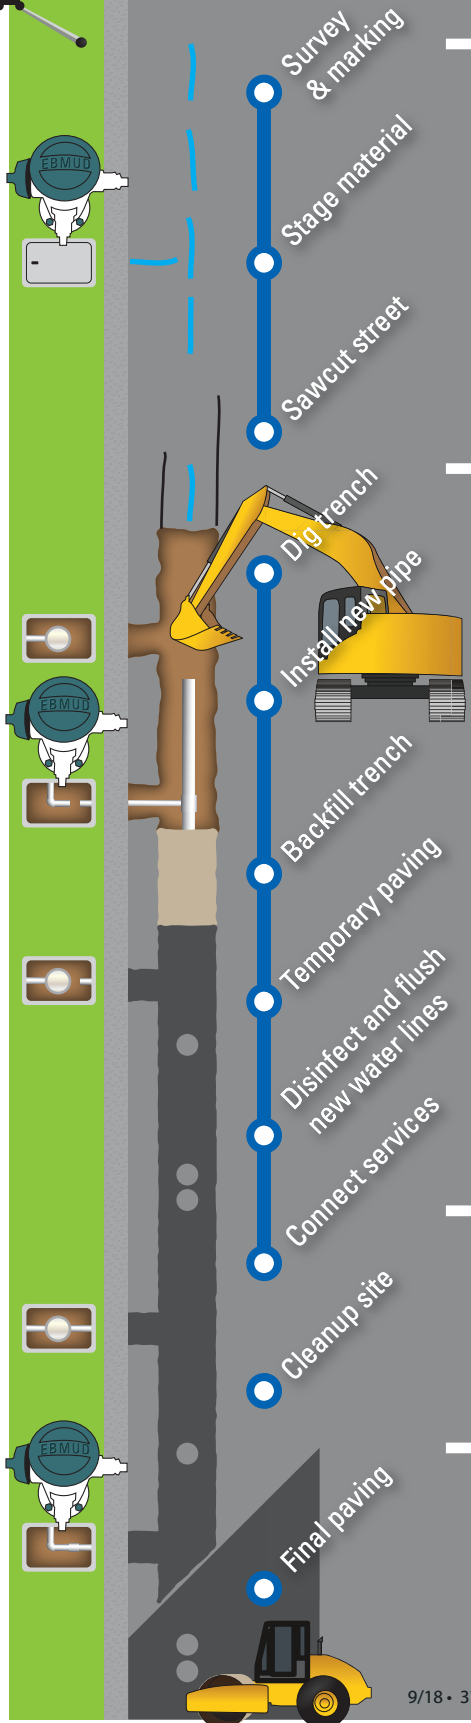

Start up activities

- Place signs
- Mark and USA alignment
- Order and deliver materials to jobsite
- Confirm alignment (potholing and sawcutting)
- Mobilize mainline crew and equipment

Mainline construction activities

- Construct pipeline
- Backfill, temporary paving, compaction testing
- Pressure testing
- Disinfect new main
- Construct hydrants, new connections, and kills
- Transfer customers to new main

Could include various delays due to:
weather, permits, equipment failures, utility conflicts, design changes

(Coincides with Construction Inspection Start and In-Service dates)

Close out activities

- Complete punchlist
- Clean up jobsite
- Demobilize mainline crew and equipment

Final street restoration

- Concrete
- Paving and striping

Neighborhood presence

Mainline construction